

User Instructions

**IP54 LED Portable
Rechargeable Work Light**

SKU: AB031, AB032, AB033



AB031




AB032




AB033

WHAT'S IN THE BOX



LED Worklight x 1




Charging Cable x 1

PLEASE KEEP THESE INSTRUCTIONS FOR FURTHER REFERENCE

SPECIFICATION

| | | | |
|---------------------------|--|--------------|--------------|
| Model: | AB031 | AB032 | AB033 |
| Material: | Aluminium Frame With Tempered Glass | | |
| Wattage: | 10W | 20W | 30W |
| Light Source Lumens*: | 1020LM | 2200LM | 3300LM |
| Luminaire Lumens: | 800LM | 1600LM | 2400LM |
| Li-Ion Battery: | 3.7V 2200mAh | 3.7V 4400mAh | 3.7V 6600mAh |
| ON/OFF Switch: | 100%-50%-OFF | | |
| Charging Time: | Approx. 2.5H | Approx. 3.5H | Approx. 4.5H |
| Working Time: | Approx. 3 hours / 6 hours depending on setting | | |
| Charging Cable: | 1 Meter Type-C USB charging cable | | |
| Battery status indicator: | NO | YES | YES |
| USB Input: | 5VDC 2A | | |
| USB Output: | 5VDC 1A | | |
| IP Rating: | IP54 | | |

SYMBOLS, DECLARATIONS & CAUTIONS



Replace any cracked protective shield



The product complies with the applicable European directives and an evaluation method of conformity for these directives has been completed.



UK Conformity Assessed.




This marking indicates that this product should not be disposed with other household waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources.


HEALTH AND SAFETY

- Use of a power supply, charger, or cable not recommended or sold with this unit may result in a risk of fire or injury to persons.
- DO NOT use the product if it has been damaged or modified. Damaged or modified batteries may exhibit unpredictable behavior resulting in fire, explosion or risk of injury.
- DO NOT subject to vibration, impacts, or drops. The housing may not show signs of damage, but internal components may have been compromised. It is advisable to replace the unit if any such severe events occur.
- DO NOT expose to direct sunlight, open flame, heat sources, equipment that produces heat, or extremes in environmental temperature. Keep away from high voltage devices.
- DO NOT attempt to repair the light or charging cable. There are no user-serviceable parts.
- DO NOT immerse in water or other liquids. Avoid liquid spillages and beware of objects falling into openings in the enclosure.
- Risk of fire and burns. DO NOT open, crush or heat the product or attempt to incinerate.
- Water-resistant port cover must be properly sealed to achieve specified water & foreign object ingress protection. Keep seal free of dirt, oil, sand, or other material that interferes with proper sealing. Failure to do so can result in risk of fire or electric shock.
- Thoroughly dry the unit and the seal around the water-resistant cover completely before attempting to open the water-resistant cover.
- When the worklight is in use or charging, ensure there is adequate space to allow for ventilation of any internally generated heat.
- Use safety-rated power supply or wall adapter. Never use a power supply or wall adapter that exceeds the specified charging voltage and current.
- Route the power supply cable so that it will not be stepped on or pinched by other objects.
- IP54 rated product, is not suitable for submersion or cleaning by pressure sprays. This luminaire is only IP54 rated when the charging power socket is sealed using the supplied cover.
- This worklight is intended for normal construction use and should not be subjected to excessive force or abuse.
- Ensure the product is used with the base on flat, dry surfaces and that it does not cause a trip or fall hazard.

ASSEMBLY AND USE

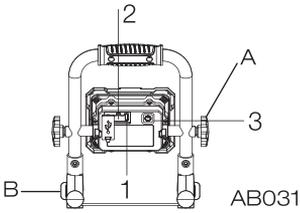


- 1: Input 5V/2A ,Type-C
- 2: Output 5V/1A,Type-A
- 3: ON/OFF Switch
- A: Adjust knob
- B: Adjust knob

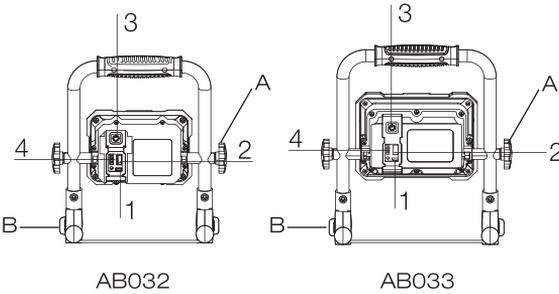

- 1: Input 5V/2A ,Type-C
- 2: Output 5V/1A,Type-A
- 3: ON/OFF Switch
- 4: Battery status indicator
- A: Adjust knob
- B: Adjust knob

This product is integrated and there is no need for installation, you can adjust the angle of the lamp through the adjust knob A. When adjusting the angle of the portable bracket, please pay attention to the rotation direction of knob B, after adjusting the angle of the portable bracket, please lock the knob B. Please do not use brute force.

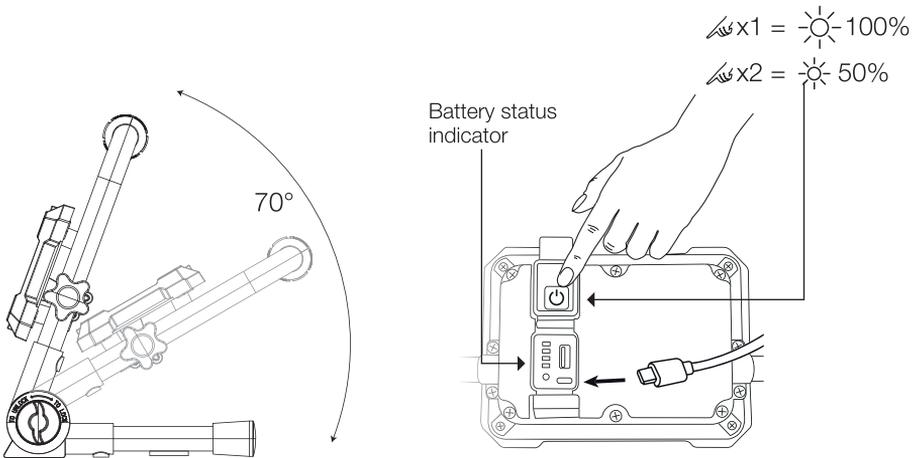

CARE AND CLEANING

Do not use abrasive or chemical cleaner. Clean the work light only with a soft and dry cloth.

Shelf Life: Charge every 3 months, otherwise the battery may be completely discharged and dead.

When not in use for an extended period of time, store the worklight in a clean, dry place away from dust.

TROUBLE SHOOTING

Use this section to help you to try and solve and problems you may have:

| PROBLEM | POSSIBLE CAUSES | REMEDIES |
|-------------------------|---|---|
| Product does not charge | The cable is not properly connected to charger output or battery input | Check connection |
| Product does not charge | The charging cable is damaged | Replace with equivalent cable. |
| Product does not charge | The charging port or device is not able to supply the minimum voltage and current for charging. | Connect to appropriate charging source. |

Note: If you experience a problem with your appliance, please do not attempt to open or repair the appliance yourself. Doing so may void the warranty and could cause damage or personal injury. If the problem still persists, please contact us by referring to the service & support information on the following page.

DECLARATION OF CONFORMITY / PERFORMANCE



Product Code: AB031, AB032, AB033

Product Description: Portable Rechargeable LED Work Light

1.Toolstation (company number 04372131)

Toolstation is part of Travis Perkins

2.Object of the declaration

The object of the declaration described above is in conformity with the relevant Community harmonization legislation:

- LVD:(2014/35/EU)
- EMC:(2014/30/EU)
- ErP:(EU)2019/2020,(EU)2021/341,(EU)2019/2015,(EU)2021/340 and (EU)2023/2048
- REACH:(EC)No 1907/2006
- RoHS:2011/65/EU.(EU)2015/863

Photobiological safety of lamps and lamp systems

3. References to the relevant standards used (or references to the specifications in relation to which conformity is declared:

- EN IEC 60598-1:2021+A11:2022 ;
- EN 60598-2-4:2018 ;
- EN 62493:2015+A1:2022 ;
- EN 62471:2008
- EN IEC 55015:2019+A11 ;
- EN 61547:2009

ENVIRONMENTAL INFORMATION



The symbol on the product or its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste for recycling, please contact your local authority, or where you purchased your product.

GUARANTEE

Wessex products are produced to industry standards with a focus on design and durability. All WESSEX products are individually tested before leaving the factory. Your product is under guarantee for 1 year from the date of purchase or the date of delivery of the product, if later, the guarantee is subject to the following provisions:

- The guarantee does not cover accidental damage, misuse, cabinet parts, knobs, or consumable items.
- The product must be correctly installed and operated in accordance with the instructions.
- The guarantee will be rendered invalid if the product is re-sold.
- Specifications are subject to change without notice.
- The manufacturer is not liable for any accidental and/or subsequent damage.
- The guarantee does not affect your statutory rights.

CUSTOMER SUPPORT

www.toolstation.com/contact

Call us 0808 100 7211

Mobile friendly 0330 333 3303

Email info@toolstation.com

Made in China