

143X210MM




Original User's Instructions

IP65 LED Worklight



SKU:21657

SKU:48670

SKU:97243

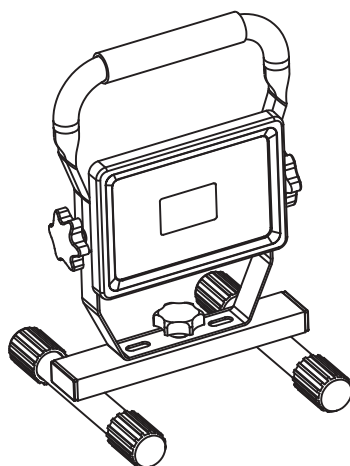

WHAT'S IN THE BOX

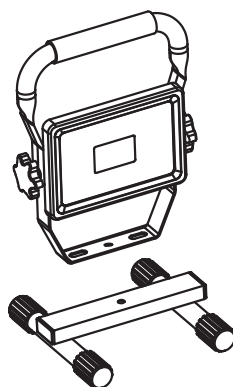

M6x25mm

x1



x1 Ø12--Ø6.5 mm



x1 Ø10--Ø6.5 mm

PLEASE KEEP THESE INSTRUCTIONS FOR FURTHER REFERENCE

SPECIFICATION

21657:

- 6500K Cool White
- Beam Angle 110°
- 2M Cable with Plug
- Lifetime 25,000h
- Cable storage

48670:

- 6500K Cool White
- Beam Angle 110°
- 2M Cable with Plug
- Lifetime 25,000h
- Cable storage

97243:

- 6500K Cool White
- Beam Angle 110°
- 2M Cable with Plug
- Lifetime 25,000h
- Cable storage

Non-replaceable light source & control gear.

TECHNICAL DATA

Model	2010A-3G	2120A-3G	2230A-3G
Rated Power Rate	10W	20W	30W
Dimension(H x L x W-mm)	137x133x220.4mm	173x163x252mm	217x183x301mm
Net Weight(g)	784g	1000g	1350g
Light Source Lumens*	1200lm	2400lm	3600lm
Luminaire Lumens	1050lm	2100lm	3150lm
Rated Voltage	220V-240V~50Hz		
Plug	BS PLUG		
Power Cord Length(mm)	2000mm		
Power Cord Spec	H05RN-F3G1.0mm ²		

EXPLANATIONS AND SYMBOLS, CAUTIONS AND WARNINGS



Replace any cracked protective shield

21657:101x77x3mm

48670:130x90x3mm

97243:172x120x3mm



Earthing connection


HEALTH AND SAFETY

- Do not use the fitting without the safety shield fitted.
- Replace the safety shield if it is cracked or broken.
- Suitable for indoor and outdoor use.
- When used outdoors the luminaire must be connected to a min IP65 power socket to maintain the IP65 rating.
- Position your work light so that the cable hangs down the stand to the floor.
- Do not use with the cable stretched or under tension.
- Do not stand the work light in a walk-way or thoroughfare to avoid damage or injury.
- Use only on a firm, flat and level surface.
- Ensure cable and work light do not cause a trip hazard.
- If the external flexible cable of this luminaire is damaged it shall be exclusively replaced by repair or service agent or similar qualified person.

ASSEMBLY AND USE

The stand is attached to the bracket beneath the body of the light using the screw supplied fitted into the base.

When assembling, ensure all screws are tightened sufficiently to retain components securely in position but take care not to overtighten.

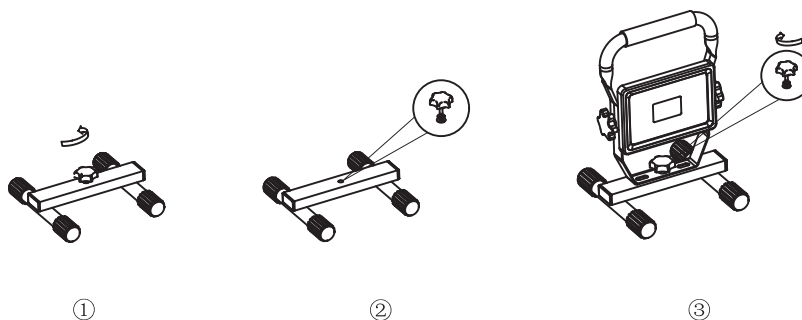

CARE AND CLEANING

- Do not use abrasive or chemical cleaners. Clean your worklight only with a soft and dry cloth.

TROUBLE SHOOTING

Use this section to help you to try and solve any problems you may have:

- Replace any cracked protective shield.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard.

NOTE: IF YOU EXPERIENCE A PROBLEM WITH YOUR APPLIANCE, PLEASE DO NOT ATTEMPT TO OPEN OR REPAIR THE PRODUCT YOURSELF. DOING SO MAY VOID THE GUARANTEE AND COULD CAUSE DAMAGE OR PERSONAL INJURY. IF THE PROBLEM STILL PERSISTS, PLEASE CONTACT US BY REFERRING TO THE SERVICE & SUPPORT INFORMATION ON THE FOLLOWING PAGE.

DECLARATION OF CONFORMITY



Product Code
(21657/2010A-3G)
(48670/2120A-3G)
(97243/2230A-3G)

Product Description(PORTABLE LED WORKLIGHT)

1. Toolstation (company number 04372131)
Toolstation is part of Travis Perkins

2. Object of the declaration

The object of the declaration described above is in conformity with the relevant Community harmonization legislation:

- LVD: (2014/35/EU)
- EMC: (2014/30/EU)
- ErP:(EU)2019/2020, (EU)2021/340, (EU) 2021/341 and (EU)2019/2015
- REACH: (EC) No 1907/2006
- RoHS:2011/65/EU, (EU)2015/863
- Photobiological safety of lamps and lamp systems

3. References to the relevant standards used (or references to the specifications in relation to which conformity is declared:

- EN60598-2-4:2018,EN60598-1:2015+A1:2018, EN60598-2-5:2015,EN62493:2015
- EN 61547:2009,EN IEC 55015:2019, EN IEC 61000-3-2:2019, EN61000-3-3:2013+ A1:2019
- EN 62471:2008

ENVIRONMENTAL INFORMATION



■ The symbol on the product or its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste for recycling, please contact your local authority, or where you purchased your product.

GUARANTEE

WESSEX products deliver reliable service for normal settings. All WESSEX products are individually tested before leaving the factory.

Your product is under guarantee for 1 year from the date of purchase or the date of delivery of the product, if later.

The guarantee is subject to the following provisions:

- The guarantee does not cover accidental damage, misuse, cabinet parts, knobs, or consumable items.
- The product must be correctly installed and operated in accordance with the instructions contained in this manual.
- The guarantee will be rendered invalid if the product is re-sold.
- Specifications are subject to change without notice.
- The manufacturer disclaims any liability for the incidental or consequential damages.
- The guarantee is in addition to, and does not diminish your statutory or legal rights.

WESSEX

Imported by Toolstation (company number 04372131)

Toolstation is a Travis Perkins company

Made in China