
143x210mm


User's Instructions


IP65 LED Worklight


SKU:31683

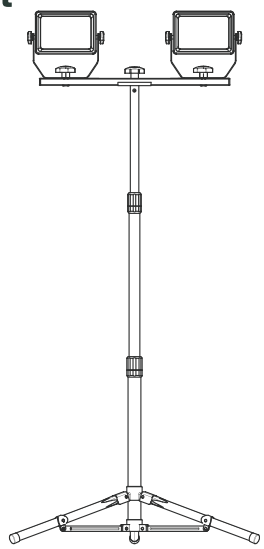

WHAT'S IN THE BOX



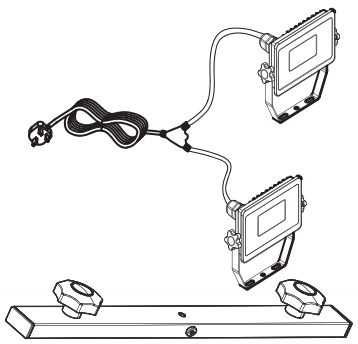



x1 M6x30mm




x1 Ø12--Ø6.5mm



x1 Ø9--Ø6mm

PLEASE KEEP THESE INSTRUCTIONS FOR FURTHER REFERENCE

TOOLS REQUIRED



PH

SPECIFICATION

- 6500K Cool White
- Beam Angle 100°
- 3M Cable with Plug
- Lifetime 25,000h
- Cable storage

Non-replaceable light source & control gear.

TECHNICAL DATA

Model	212028A-9
Rated Voltage	220-240V~50Hz
Rated Power Rate	2x20W
Plug	BS PLUG
Light Source Lumens*	2*2400lm
Luminaire Lumens	2*2100lm
Power Cord Length(mm)	3000mm
Power Cord Spec	H05RN-F3G1.0mm²
Dimension(H x L x W-mm)	1755x940x800mm
Net Weight(g)	3300g

EXPLANATIONS AND SYMBOLS, CAUTIONS AND WARNINGS




Replace any cracked protective shield 130*90*3mm



Earthing connection


HEALTH AND SAFETY

- Do not use the fitting without the safety shield fitted.
- Replace the safety shield if it is cracked or broken.
- Suitable for indoor and outdoor use.
- When used outdoors the luminaire must be connected to a min IP65 power socket to maintain the IP65 rating.
- Position your work light so that the cable hangs down the stand to the floor.
- Do not use with the cable stretched or under tension.
- Do not stand the work light in a walk-way or thoroughfare to avoid damage or injury.
- Use only on a firm, flat and level surface.
- Ensure cable and work light do not cause a trip hazard.
- If the external flexible cable of this luminaire is damaged it shall be exclusively replaced by repair or service agent or similar qualified person.
- Maximum Adjustment can not exceed red line

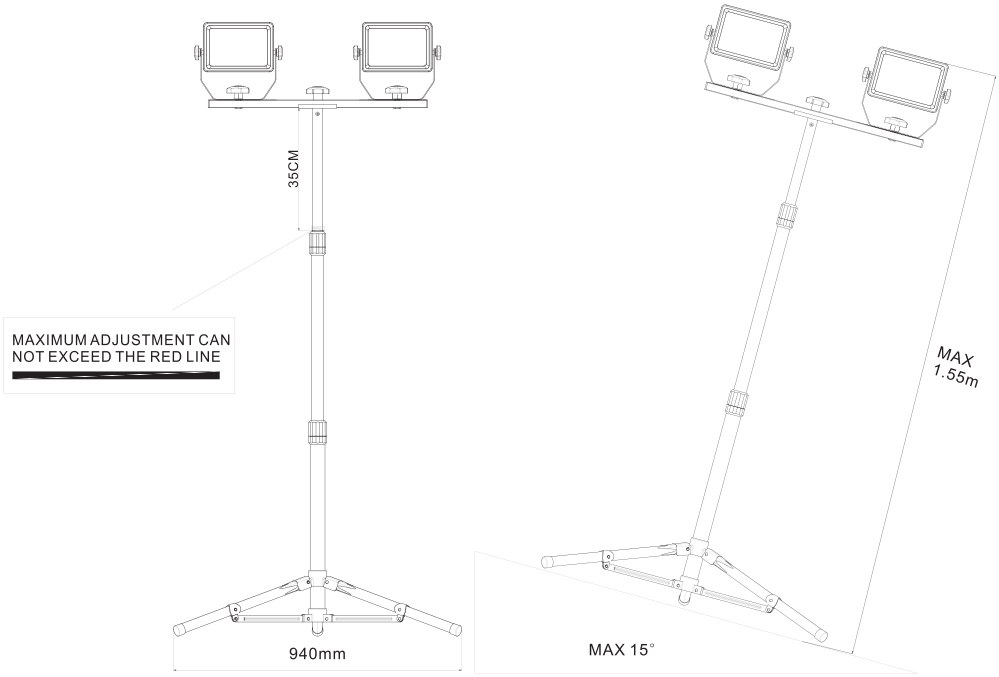

ASSEMBLY AND USE

- Note the presence of a pip on the face of the cable junction between the two lights. Lay the lights face down on a working surface so that the pip on the cable junction also faces down.
- Lay the yellow bar (part of the stand) on your working surface so that the small screw faces you.
- Remove the small screw and use it to attach the cable junction.
- Using the screws supplied fitted to the bar, attach the lights so the cable lays on top.
- Remove the last screw and washers from their pack and use to secure the bar complete with lights onto the top of the stand.

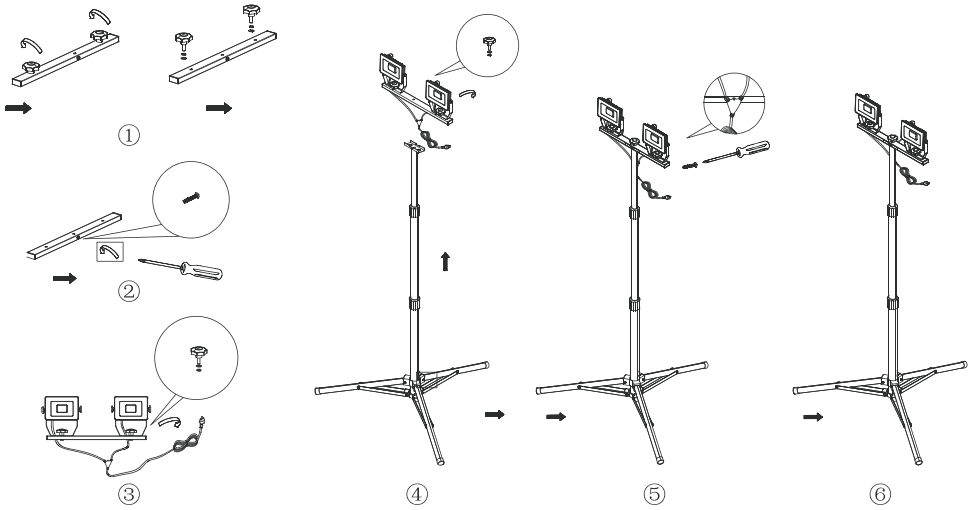

CARE AND CLEANING

- Do not use abrasive or chemical cleaners. Clean your worklight only with a soft and dry cloth.

TROUBLE SHOOTING

Use this section to help you to try and solve any problems you may have:

- Replace any cracked protective shield.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid a hazard.

NOTE: IF YOU EXPERIENCE A PROBLEM WITH YOUR APPLIANCE, PLEASE DO NOT ATTEMPT TO OPEN OR REPAIR THE PRODUCT YOURSELF. DOING SO MAY VOID THE GUARANTEE AND COULD CAUSE DAMAGE OR PERSONAL INJURY. IF THE PROBLEM STILL PERSISTS, PLEASE CONTACT US BY REFERRING TO THE SERVICE & SUPPORT INFORMATION ON THE FOLLOWING PAGE.

DECLARATION OF CONFORMITY

Product Code (31683/212028A-9)
Product Description (LED TRIPOD WOKRLIGHT)

1. Toolstation (company number 04372131)
   Toolstation is part of Travis Perkins

2. Object of the declaration

The object of the declaration described above is in conformity with the relevant Community harmonization legislation:

- LVD: (2014/35/EU)
- EMC: (2014/30/EU)
- ErP:(EU)2019/2020, (EU)2021/341, (EU) 2019/2015,(EU)2021/340 and (EU)2023/2048
- REACH: (EC) No 1907/2006
- RoHS:2011/65/EU, (EU)2015/863
- Photobiological safety of lamps and lamp systems

3. References to the relevant standards used (or references to the specifications in relation to which conformity is declared:

- EN 60598-2-5:2015,EN 60598-2-4:2018,EN IEC 60598-1:2021+A11:2022
  EN 61347-2-13:2014+A1:2017,EN 61347-1:2015+A1:2021,EN IEC 62031:2020,
  IEC TR 62778:2014,EN 62493:2015+A1:2022,EN 60598-1:2015+A1:2018,
  EN 62493:2015+A1:2022
- EN IEC 55015:2019+A11:2020, EN 61547:2009, EN IEC 61547:2023
- EN IEC 61000-3-2:2019+A1:2021, EN IEC 61000-3-2:2019 +A2:2024
- EN 61000-3-3:2013+A1:2019+A2:2021
- EN 62471:2008

ENVIRONMENTAL INFORMATION



The symbol on the product or its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste for recycling, please contact your local authority, or where you purchased your product.

GUARANTEE

WESSEX products deliver reliable service for normal settings. All WESSEX products are individually tested before leaving the factory.

Your product is under guarantee for 1 year from the date of purchase or the date of delivery of the product, if later.

The guarantee is subject to the following provisions:

- The guarantee does not cover accidental damage,misuse,cabinet parts, knobs, or consumable items.
- The product must be correctly installed and operated in accordance with the instructions contained in this manual.
- The guarantee will be retendered invalid if the product is re-sold.
- Specifications are subject to change without notice.
- The manufacturer disclaims any liability for the incidental or consequential damages.
- The guarantee is in addition to,and does not diminish your statutory or legal rights.



WESSEX

Imported by Toolstation (company number 04372131)

Toolstation is a Travis Perkins company

Made in China