





User Instructions

Round Diverter Shower Kit

68885 (V1)

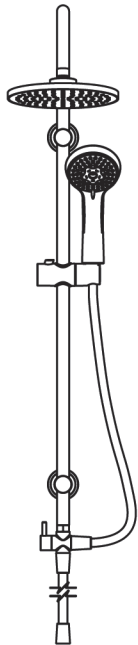


WHAT'S IN THE BOX

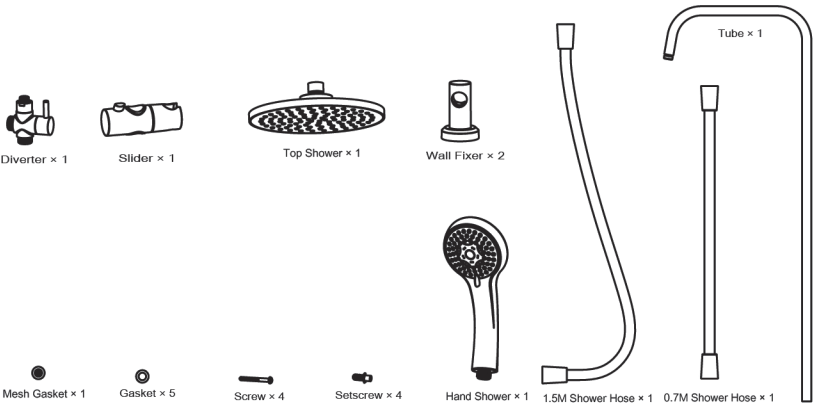

If you need any help, please contact us:
0808 100 7211 or 0330 333 3303

PLEASE KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE

TOOLS REQUIRED (tools not supplied)

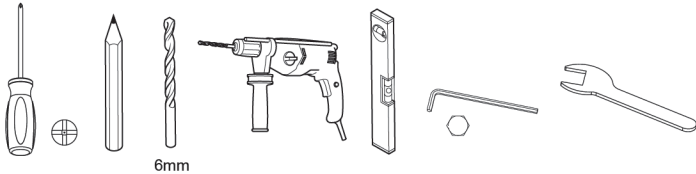

HEALTH AND SAFETY


- Identify all components and check pack contents.
- Turn off mains water supply.
- Prior to drilling into walls, check that there are no hidden electrical wires, cables or water supply pipes. This can be checked with the aid of an electronic detector.
- Wear eye protection.

SPECIFICATION

- 304 stainless steel
- Brass quick diverter, ceramic cartridge
- 3 spray shower
- The shower kit is suitable for use at water supply pressures of 0.1 bar (min.) to 5 bar (max.).
- This pressure rating is determined by the manufacturer using soft water under test house conditions and may differ to the retailer's recommendation.


ASSEMBLY AND USE

1. Establish height of shower kit to suit user's requirements.
2. Mark the wall where the wall fixer(4) is to be fixed ensuring there are no pipes or cables.
3. Dissociate inner fixer(6) from wall fixer(4) by Counterclockwise rotation.
4. Drill and plug the wall and fit inner fixer(6). If replacement shower kit,fix and screw into existing hole. If new installation, ensure the screw hole position is vertically aligned using a spirit level and mark the wall.
5. Put the tube(3) through the wall fixer(4) and slider(9), and twist the wall fixer(4) to the inner fixer(6).
6. Check the seal ring(13) is intact on the inner connector(14), put the inner connector(14) through the nut(12), tightening with the tube(3) by using hex wrench.
7. Connect the diverter(15) to the nut(12), don't forget to put the gasket(10) in correct position.
8. Connect the shower (8) to the long hose (11) , don't forget to put the gasket(10) in correct position, the other end of shower hose connect the side thread of diverter(15) .
9. One end of short hose connect to bottom thread of diverter(15) and the other end connect to your faucet, don't forget to put the gasket(10) in correct position.
10. Connect the top shower (1) to thread of the tube (3) , don't forget to put the mesh gasket(2) in correct position.

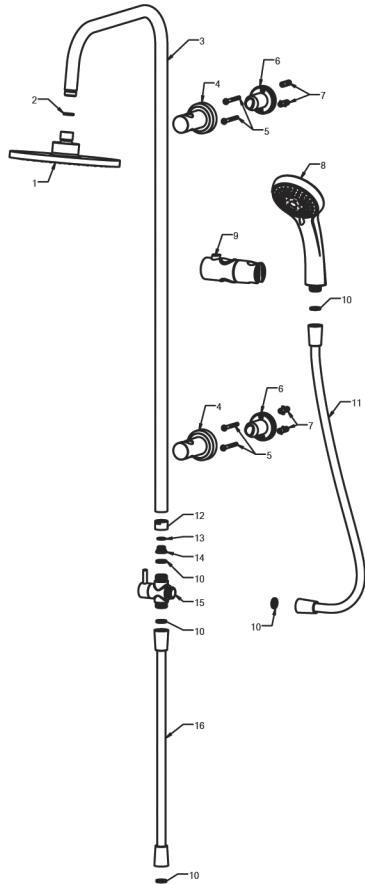

CARE AND CLEANING

- Whilst modern plating techniques are used in the manufacture of these fittings, the plating will wear if not cleaned properly. The safest way to clean your product is to wipe with a soft damp cloth, do not use abrasive cleaners. Stains can be removed using washing up liquid. All cleaning powders and liquids will damage the surface of your fitting even the non-scratch cleaners.
- This showerhead should be cleaned periodically to remove limescale or debris, which may reduce the performance of the shower. The frequency of cleaning will vary according to the local water quality.
- 1.To break away scale on a daily basis, rub your thumb over the surface whilst the shower is running.
- 2.If scale deposits are stubborn, soak the showerhead in a proprietary limescale remover and rinse thoroughly before use.

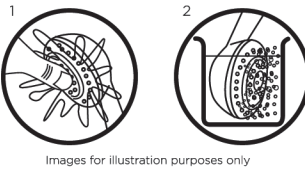

Images for illustration purposes only

TROUBLE SHOOTING

PROBLEM	POSSIBLE CAUSE	REMEDY
Slider can not fix on the tube	Fixed block fall off	Refit fixed block or contact your dealer
Water dripping from showerhead	This is normal for a short time after using	This is caused by residual water tension, the build up of water in the showerhead
No flow or low flow rate	Partially closed isolation valve	Open isolation valve
	Airlock or partial blockage in the supply pipework	Flush through pipework to ensure removal of debris and any airlocks

CUSTOMER SUPPORT

www.toolstation.com/contact
Call us 0808 100 7211
Mobile friendly 0330 333 3303
Email info@toolstation.com

Made in China

Imported by Toolstation (company number 04372131) - Toolstation is a Travis Perkins company.