


SHOWERMATE

Standard Twin Pumps

Showermate Standard Twin pumps are designed for installation into vented systems to equally boost both the hot and cold water supplies to the bathroom or a single shower.

They require a gravity flow of more than 0.8 litres per minute through the outlet to start and are suitable for positive head applications.

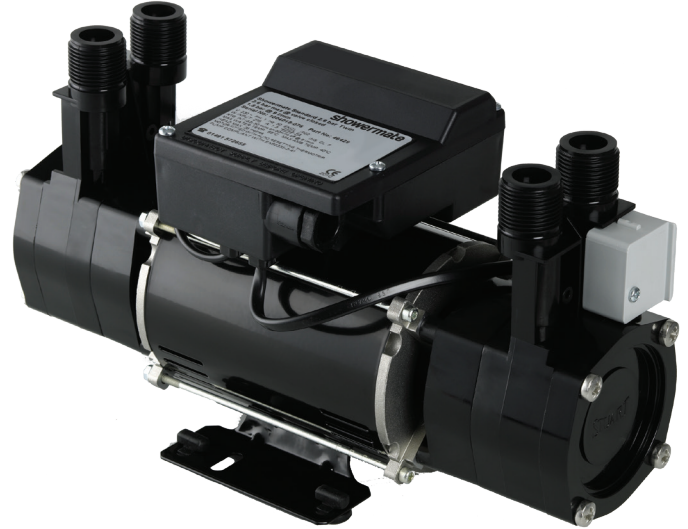


Features


- 3 year guarantee
- 1.8 and 2.6 bar options
- Suitable for positive head applications
- High quality, high performing plastic pump supplied with 15 mm flexible hoses with integral ISO valves
- Quiet operation
- WRAS approved product
- Continuously rated
- Anti-vibration feet
- EPDM/PTFE/Al. Oxide seal
- Pre-wired with 1.5 metre power cable

Application

- Boosting hot and cold water supplies to taps, showers or a complete bathroom in low pressure gravity systems
- Suitable for use where there is already more than 1 litre/sec flow from the outlet(s) to be boosted

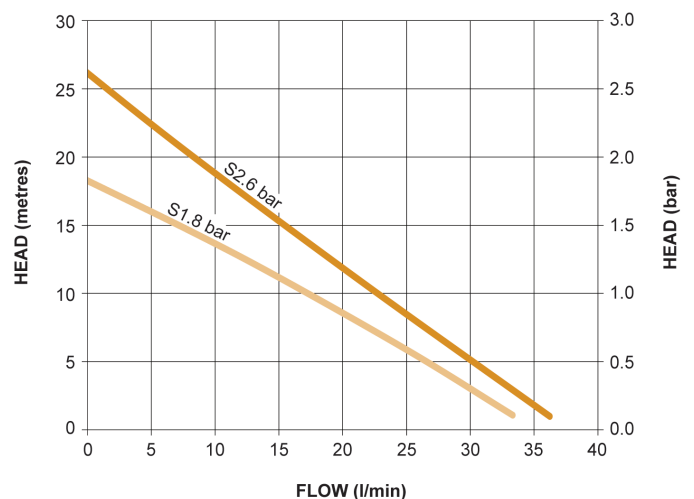

Pump Model		S1.8 bar Twin 46407	S2.6 bar Twin 46431
General	Guarantee	3 years	
	WRAS approval	1709101	
	Approvals	WRAS, CE	
Features	Pump type	Peripheral	
	Mechanical seal	EPDM / PTFE / Al. Oxide	
	Anti-vibration feet	✓	✓
	Flexible hoses	4	4
	Dry run protection	✓	✓
	Noise (dB(A))	55	56
Materials	Pump body	Plastic	
	Impeller	Plastic	
Performance	Maximum head (closed valve)	1.8 bar (18 metres)	2.6 bar (26 metres)
	Performance @ 9 l/min	1.5 bar	1.9 bar
	Performance @ 18 l/min	0.8 bar	1.3 bar
	Maximum flow	33 l/min	36 l/min
	Maximum static inlet pressure	13 metres	
	Maximum working pressure*	380 kPa (3.8 bar)	
	Maximum ambient air temperature	40 °C	
	Min / Max water temperature**	Min 4 °C / Max 65 °C	
	Flow switch sensitivity (approx)	0.8 l/min	
Connections	Pump connections	G ¾ male	
Flexible hoses	Connections (UK model)	G ¾ female x 15 mm push-in x 200 mm long, isolating valves on inlet hoses	
Motor	Type	Induction, auto-reset thermal trip	
	Duty rating	Continuous (S1) @ 9 l/min and above ***	
Electrical	Power supply / phase / frequency	230 V a.c. / 1 / 50 Hz	
	Current (full load)	1.8 Amps	2.2 Amps
	Power consumption	405 Watts	505 Watts
	Fuse rating	5 Amps	
	Power cable (pre-wired)	1.5 metres	
Physical	Enclosure protection	IP22	
	Length	304 mm	319 mm
	Width	132 mm	
	Height (excluding hoses)	179 mm	
	Weight (including fittings)	4.6 Kg	5.4 Kg

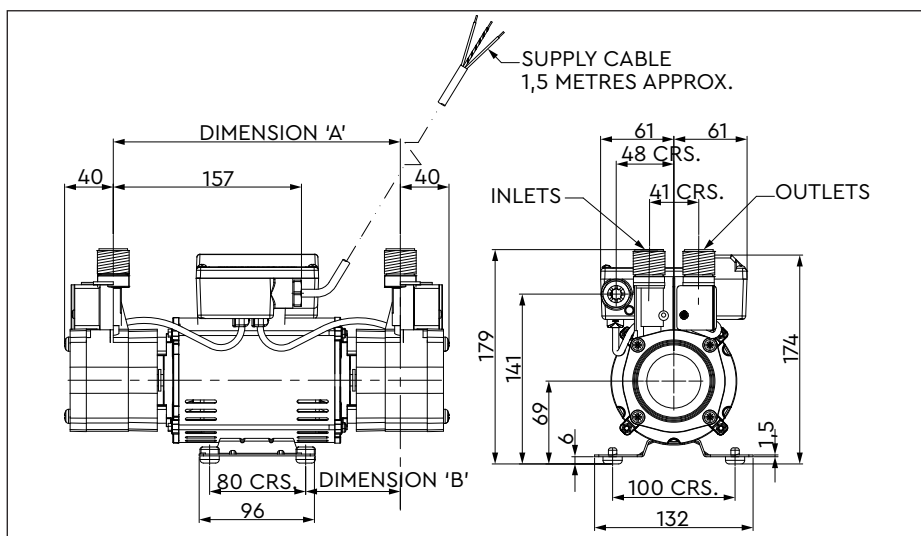

* The maximum pressure that can be applied to the pump under any installation conditions.

** A stored water temperature of 60 °C is considered sufficient to meet all normal requirements and will minimise deposition of scale in hard water areas.

*** Both heads pumping 4.5 l/min and above.

Pump Description	Dim. 'A'	Dim. 'B'
S1.8 bar Twin	224 mm	71 mm
S2.6 bar Twin	239 mm	79 mm

Stuart Turner Limited reserves the right to amend specifications without notice.

Stuart Turner Ltd, Henley-on-Thames, Oxfordshire RG9 2AD Tel: +44 (0) 1491 572655 Fax: +44 (0) 1491 573704
TechAssist Helpline +44 (0) 800 31 969 80
www.stuart-turner.co.uk

Pt. No. 19215 Issue 1919/3-01