

1.8m x 25mm/6' x 1" CAM BUCKLE TIE-DOWN SET 2 PACK


- Working load - 136kg/breaking strain - 272kg
- Conforms to: EN12195-2




ASSEMBLY INSTRUCTIONS



COMPONENT LIST: (a) Webbing strap (b) Cam buckle (c) Lock plate

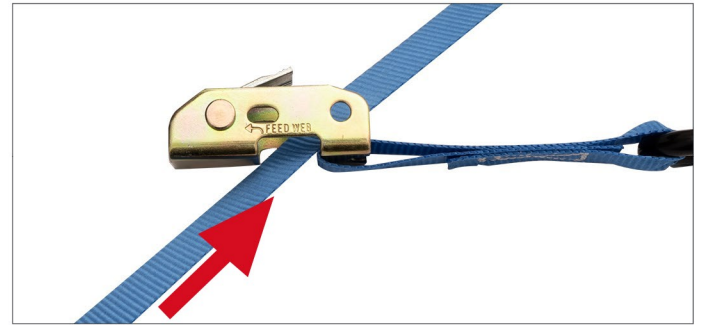

1 Feed approximately 20cm of the long webbing strap up and through the cam buckle in the direction of the arrow shown above.

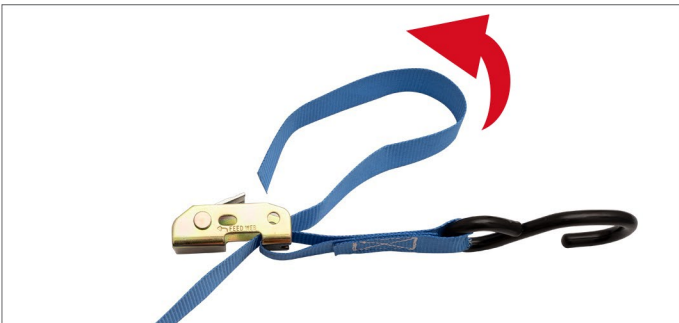

2 Loop the webbing strap back around towards the cam buckle.



3 Press down the lock plate to feed webbing strap underneath.



4 Release the lock plate to secure the webbing strap.



5 To adjust, press and hold the lock plate while pulling webbing strap.



WARNING: PLEASE READ ALL INSTRUCTIONS BEFORE USE. FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE SERIOUS BODILY INJURY AND/OR DAMAGE TO PERSONAL PROPERTY, AND/OR THE PRODUCT. PRODUCT SUITABLE FOR USE IN TEMPERATURES BETWEEN -40C TO 80C. CHECK BEFORE USE AND DISCARD IMMEDIATELY IF SIGNS OF WEAR OR DAMAGE. CHECK REGULARLY DURING LONG JOURNEYS TO ENSURE NO LOOSENING OF THE STRAP HAS OCCURRED. NEVER SECURE AROUND SHARP OR ABRASIVE EDGES. ACID AND EXCESSIVE HEAT WILL IRREVERSIBLY DAMAGE THE TIE-DOWN STRAP. DO NOT KNOT OR USE THE STRAP AND BRACKET SEPARATELY. NEVER EXCEED THE SAFE WORKING LOAD AND DO NOT OVERTIGHTEN. TAKE EXTRA CARE WHEN UPLOADING TO ENSURE THE LOAD IS INDEPENDENT OF THE TIE-DOWN STRAP WHEN RELEASED SO THAT REMOVING THE TIE DOWN STRAP WILL NOT CAUSE THE LOAD TO SHIFT OR FALL. DO NOT USE FOR LIFTING OR TOWING. STORE SAFELY IN A DRY PLACE. KEEP OUT OF REACH OF CHILDREN.