






3 PORT MOTORISED MID-POSITION VALVE

Product Code: VAL322MP - C

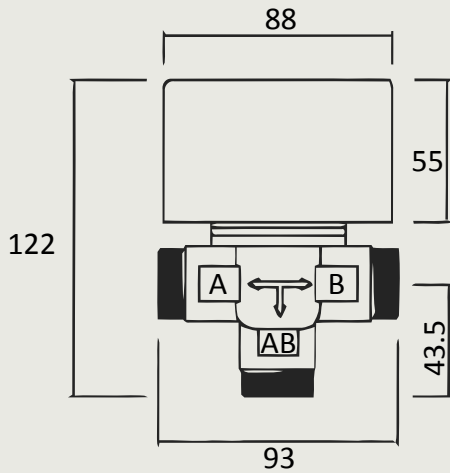

All Dimensions shown in millimetres

- PORT AB = Pumped flow from boiler
- PORT A = Heating Circuit
- PORT B = Domestic Hot Water Circuit

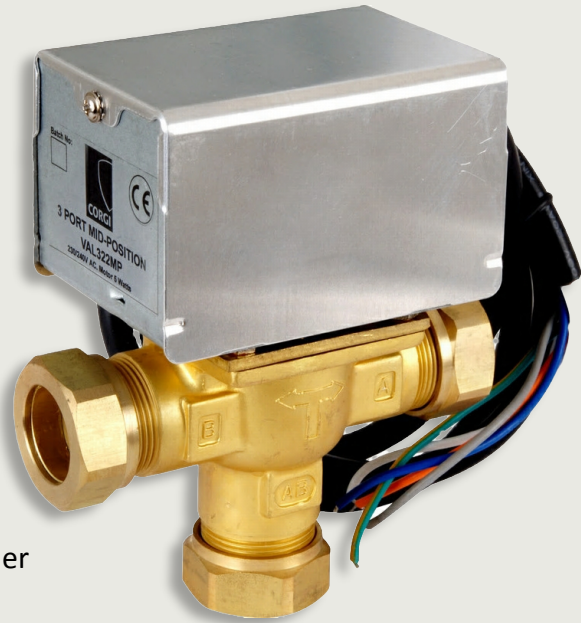

Technical specification:

- Auxiliary switch
- 1m 5-core flex.
- Switch rating 3A resistive
- Industry standard flex colours: white; blue; grey; orange; green/yellow

- Synchronous motor drive / spring return action.
- Integrated manual lever for commissioning.
- Supply 230V 50Hz / power consumption 6W
- Operating temperature range: +5 to 88°C
- Maximum differential pressure 1 Bar
- Maximum static pressure 10.0 Bar
- 22mm compression fittings are supplied.
- Replaceable actuator head, which can be exchanged without having to drain-down the system.

