



User instructions

PROFESSIONAL SAW HORSE 75618



Dimensions

107.2 x 61 x 82 cm

- Adjustable legs for different heights or uneven surfaces
- Folds flat for easy storage
- Closed size: 898 x 80 x 145mm
- Working Width: 1072mm
- Maximum load capacity: 589Kg

Safety Instructions

IMPORTANT - Please read and understand this entire manual before attempting to operate the product.



1. TO REDUCE THE RISK OF PERSONAL INJURY, READ AND UNDERSTAND THE INSTRUCTIONS. SAWHORSE LEGS MUST BE FULLY OPEN WITH CROSS BRACE LOCKED DOWN. DO NOT STAND ON SAWHORSE. DO NOT OVERLOAD. MAXIMUM CAPACITY 500 KG. USE ONLY ON A FLAT, DRY, HARD AND LEVEL SURFACE.
2. FOR YOUR SAFETY, PLEASE ENSURE YOU READ THESE INSTRUCTIONS CAREFULLY BEFORE USE, AND KEEP THESE INSTRUCTIONS IN THE WORK SPACE WHERE THE SAWHORSE WILL BE USED AT ALL TIMES.

Safety Information:

1. Ensure work area is well lighted while working.
2. Ensure saw horse is standing on a level surface that is clear, dry and free of debris.
3. Ensure all 4 legs have solid contact with the floor. If the saw horse is not positioned level and straight, loads placed upon it could fall, potentially causing damage to the item(s) loaded on it, and possible severe personal injury or death.
4. Ensure the load placed on any sawhorse does not exceed the applicable Safe Working Load Rating (589kg). Overloading can lead to failure of the sawhorse, potentially causing damage to the item(s) loaded on it, and possible severe personal injury or death.
5. Never stack sawhorses to obtain extra height.
6. Do not use as a step ladder or standing platform.
7. Uniformly Distributed Load: The maximum uniformly distributed load across the top rail of the sawhorse PER EACH SAW HORSE. All weight should be distributed evenly on the top rail. The amount of weight that can be applied(uniformly distributed) to two identical sawhorses is double the value as stated on the retail sticker and instruction manual.


No. 75618
Minotaur, Bridgwater, TA6 4RN
Made in China

Set-up Instructions

Assembly Instructions - Please keep for future reference


Step 1

Sawhorse in folded/carry position.

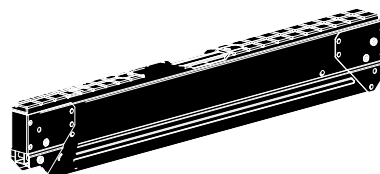


Step 2

Above location labeled "Open 1", press release button and pull down legs until the 45x95mm supports are fully deployed.

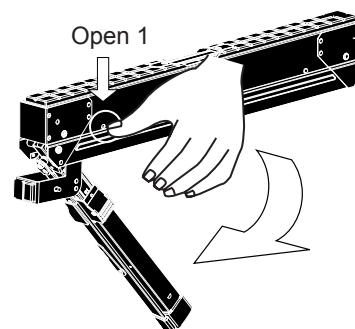


Step 3

Separate legs and push cross brace flat.

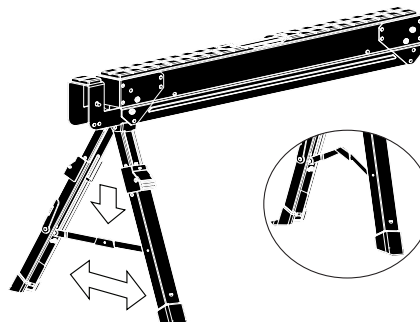

Step 4

Above location labeled "Open 2", press release button and fold down legs until the 45 x 95mm supports are fully deployed.

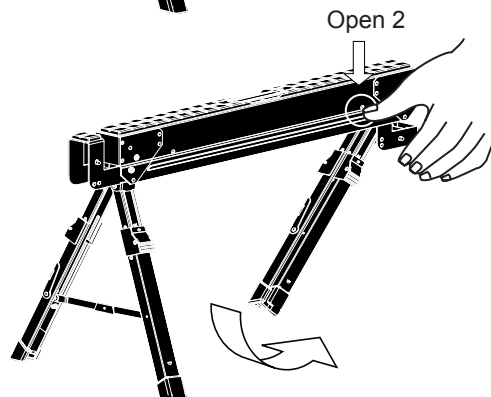


Set-up Instructions

Assembly Instructions - Please keep for future reference


Step 5

Separate legs and push cross brace flat.

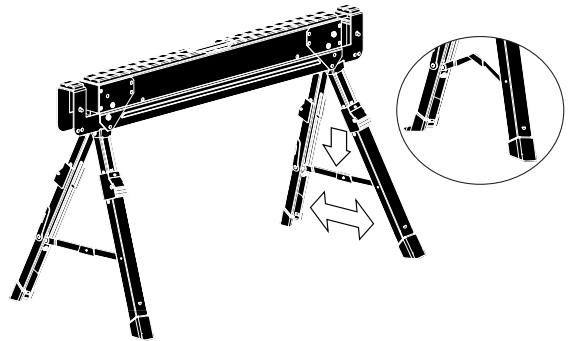

Step 6

Legs adjust in increments of 2.54cm, To extend, pull legs down until latch is locked at desired position. To retract, press lock button, pull legs down slightly then push leg up.

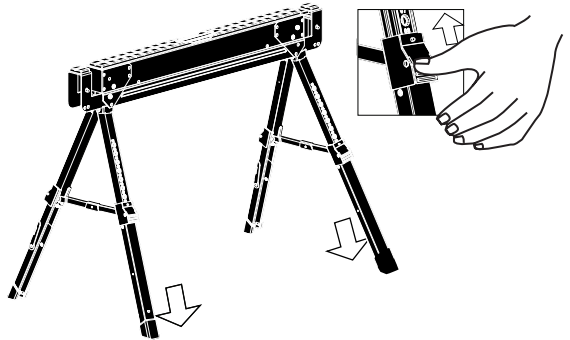

HOW TO CLOSE

1. To close, reverse steps 5 through 2, starting with leg 2.
2. Be sure locking pin engages main housing to keep legs secure while in folded/carry position.