

TOTELECTORS

Built to protect since 1944

The original safety footwear brand,
redesigned for today's wear.



TOTECTORS is the original British safety footwear worn by armies, security, industrial and construction personnel worldwide.

With 80 years of innovation, reliability and global reach, TOTECTORS revolutionize the safety footwear industry by providing the perfect solution to never compromise on your style.

You can easily keep your look with the TOTECTORS DENTON Collection. The “style meets performance” footwear for light Industries, such as assembly, automotive, food & beverages, Industry, logistics, etc.

PRODUCT NAME & CODE

DENTON AT MID

T0000003-021-001 BLACK

T0000003-045-020 WHEAT

SIZE RANGE

UK 6-13

EUR 39-47

US 7-14

DENTON AT

T0000002-021-001 BLACK

T0000002-045-020 WHEAT

**DESIGNED &
ENGINEERED IN EUROPE**



PRODUCT DESCRIPTION

The DENTON collection is certified following the highest standards for PPE (Personal Protective Equipments)


CERTIFICATION

EN ISO 20345:2011 S1P CI HI HRO SRC (CE - UKCA Certified)

- S1: Impacts and compression toe protection. Closed seat region, Antistatic properties, Energy absorption of seat region, Resistance to fuel oil.
- P: Penetration resistance
- HI/CI: Heat insulation resistance against a minimum of 150°C/Cold insulation at -17°C
- HRO: Heat resistance against 300°C on contact
- SRC: Highest rating for slip resistance (SRA + SRB)



LEATHER
UPPER



BREATHABLE
MATERIAL



SCANNER
SAFE



SHOCK
ABSORPTION



UKCA
CERTIFIED



CE CERTIFIED



INTERIOR COMPONENTS



ANTI-STATIC



SHOCK
ABSORPTION



ALUMINUM
TOE



COMPOSITE
PLATE



UKCA
CERTIFIED




CE CERTIFIED

OUTSOLE

High-Traction, slip and oil resistant TOTECTORS exclusive outsole for maximum grip and durability. The outsole design has been engineered to perform the best on indoor surfaces with optimal grip and friction.

- Large blocks around the perimeter for extra stability and durability
- Central hexagonal lugs for extra grip on wet surfaces
- TWI - Tread wear indicators to identify how much of the tread depth has worn down
- HRO hot contact resistance up to 300 °C
- FO: Fuel oil resistance
- HI/CI: Heat insulation resistance against a minimum of 150°C/Cold insulation at -17°C
- SRC: Highest rating for slip resistance (SRA tested on a ceramic tile wetted with dilute soap solution + SRB tested on smooth steel with glycerol)

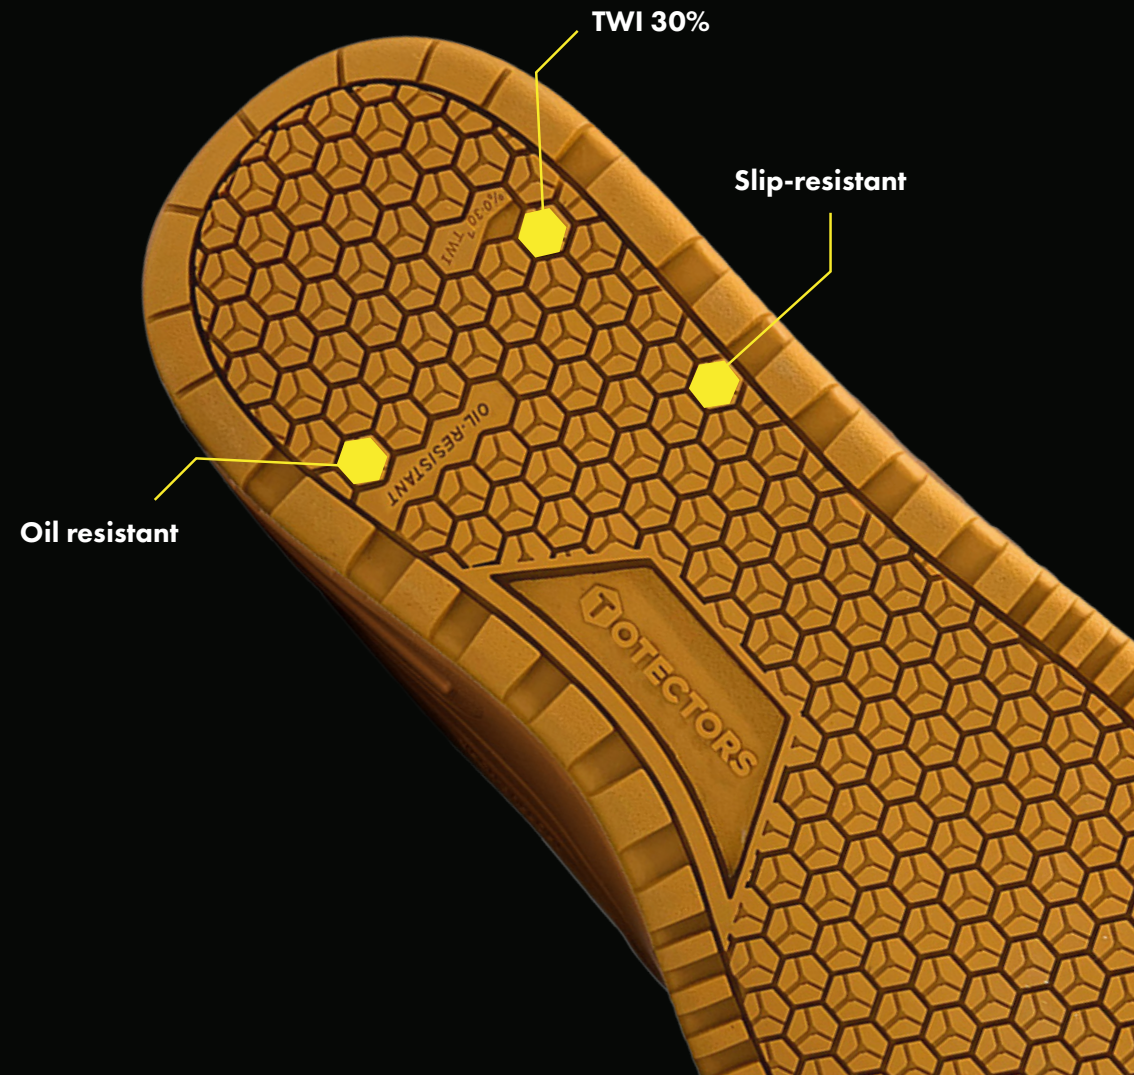

ANTI-STATIC



SHOCK
ABSORPTION



SLIP
RESISTANT



UKCA
CERTIFIED



CE CERTIFIED

CONTACT

International Brands Group BV

Amsterdamsestraatweg 15,

1411 AW Naarden,

The Netherlands

info@totectors.com

+31 (0) 35 202 0103

www.totectors.com

For more information please contact:



BENELUX SALES



UK SALES