

## Ecostat

### Shower thermostat 1001 CL for exposed installation

Finish: **Chrome** Article Number: **13211000**



#### Description

##### product features

- 1 function
- EcoStop button limits the water consumption to 10 l/min
- thermostat cartridge, ceramic valve 180°
- maximum flow rate at 3 bar: 16 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- non-return valve
- with silencer
- material handles: metal
- centre distance: 150 ± 12 mm
- connection dimension: DN15
- connection type: s-shaped connections, G 1/2
- dirt filter included

#### Technology




#### Certificates / Sustainability



#### Product image




#### Scale drawing

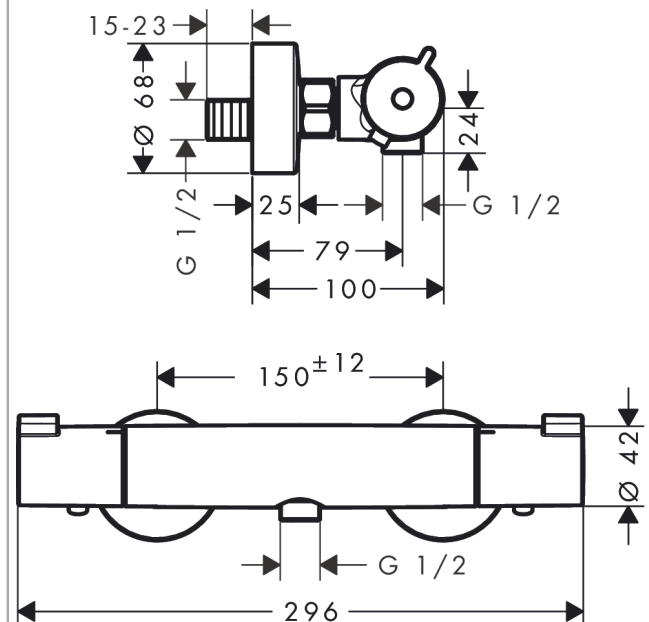

**Ecostat**  
**Shower thermostat 1001 CL for exposed installation**  
 Finish: **Chrome** Article Number: **13211000**



**Flowchart**




Shower outlet with 1B-resistance

**Ecostat**  
**Shower thermostat 1001 CL for exposed installation**  
 Finish: **Chrome**    Article Number: **13211000**



## Exploded Drawing

Year of production: >09/19

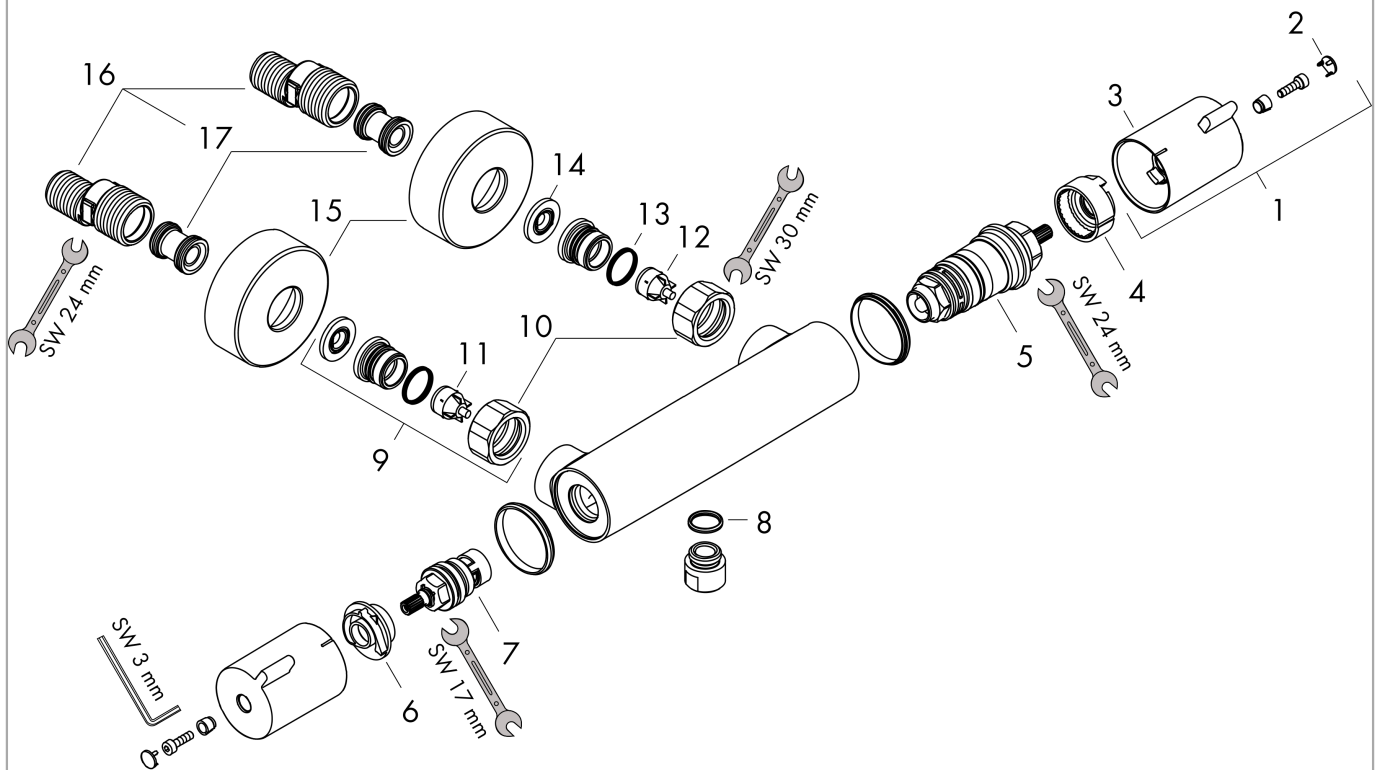

**Ecostat**  
**Shower thermostat 1001 CL for exposed installation**  
 Finish: **Chrome** Article Number: **13211000**



## Spare part list

Year of production: >09/19

| Pos. | Description                                       | Article Number | PC | PU |
|------|---------------------------------------------------|----------------|----|----|
| 1    | handle                                            | 92836000       | 9  | 1  |
| 2    | cover cap                                         | 95433000       | 2  | 1  |
| 3    | pushbutton                                        | 92848000       | 2  | 1  |
| 4    | safety set for temperature control                | 95041000       | 5  | 1  |
| 5    | thermostat cartridge                              | 94282000       | 15 | 1  |
| 6    | safety set for flow control                       | 95042000       | 5  | 1  |
| 7    | shut off unit                                     | 94149000       | 8  | 1  |
| 8    | O-ring 14x2                                       | 98129000       | 1  | 1  |
| 9    | set of unions                                     | 94285000       | 99 | 1  |
| 10   | set of nuts                                       | 96157000       | 8  | 1  |
| 11   | non return valve (pressure-resistant up to 2 MPa) | 93136000       | 8  | 1  |
| 12   | non return valve                                  | 96737000       | 8  | 1  |
| 13   | O-ring 17x1,5                                     | 98137000       | 1  | 1  |
| 14   | filter packing                                    | 96922000       | 3  | 1  |
| 15   | escutcheon Ø 68 mm                                | 96467000       | 6  | 1  |
| 16   | noise reduction                                   | 96429000       | 2  | 1  |
| 17   | set of S-unions (±12 mm)                          | 94140000       | 10 | 1  |