

**1110**  
**1110.S**

### Overhead Closers

#### Introduction

Briton 1110 is an industry leading compact, template adjustable size EN 2-4 medium duty door closer suitable for living accommodation and commercial spaces. Available with simple trimplate cover or softline all-over cover to conceal fixings and adjustment screws.

#### Features & Functions

- Template adjustable closing power size EN 2-4 (regular) EN 3 (parallel arm) applications
- Certified for door mount, transom and parallel arm applications
- Cast aluminium body
- Adjustable closing speed and latch action
- Universal fittings for door mount, transom and parallel arm mount
- Fitting template for quick, accurate installation
- Screw thread armset in forged steel for additional strength and durability (supplied with trimplate variants)
- All-over cover variants supplied with flatform arm pack
- Snap joint arm connection for quick and easy installation and maintenance
- Trimplate option a cost effective means of concealing fixing and adjustment screws
- Suitable for fire door applications
- Optional hold-open armset (**not to be used on fire doors**)
- Available in a choice of sprayed finishes and plated cover and arm options



1110.SES



1110.S.SSS

Options with Softline (S) cover shown in Satin Stainless Steel finish.



#### Certification

CE Marked to EN 1154 (2812-CPR-AD0033)

UKCA Marked to EN 1154 (1121-CPR-UK-AD7580)

Fire tested to EN 1634-1 for use on fire doors up to 2hr timber / 4hr steel [*\* May be fitted to fully insulated steel based doorsets or uninsulated steel based doorsets where the closer is fitted to the fire risk face only*].

Certifire Approved (CF388)

Environmental Product Declaration in accordance with ISO 14025 and EN 15803

DoP available at [www.britondops.co.uk](http://www.britondops.co.uk)



## Overhead Closer Briton 1110

Product features	Product references	
	1110	1110.S
Closer type	Projecting/scissor arm	Projecting/scissor arm
CE marked	■	■
Adjustable closing power EN size *	2 - 4 *	2 - 4 *
Adjustment type	Template adjustable	Template adjustable
Door limits (width/weight)	1100mm/80kg	1100mm/80kg
Maximum angle of opening	105°	105°
Adjustable closing speed & latch action	■	■
Tri-pack armset (see below)	■	■
Suitable for mounting applications	Fig.1 / Fig.61 / Fig.66	Fig.1 / Fig.61 / Fig.66
Mechanical hold-open facility (non fire doors only)	□	□
Cover variants	Trimplate	S cover
Finishes available	SES, GES	SES, PBS, PSS, SSS
<b>CE Classification</b>	<b>3 8 2-4 1 1 3</b>	<b>3 8 2-4 1 1 3</b>

- Standard
- Available as an option/variant


\* Power size EN 3 when in parallel arm mounting

Closer with trimplate (all over cover options dotted)

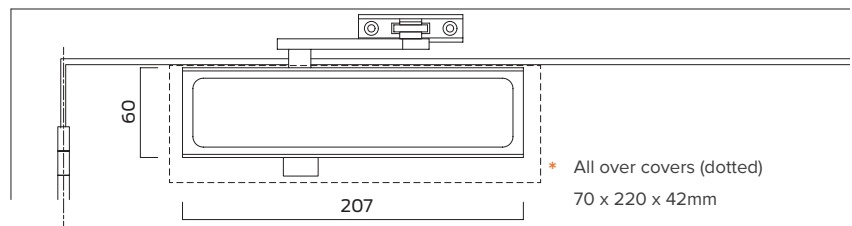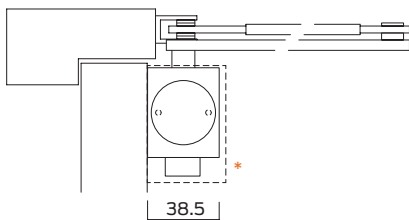

All dimensions are in mm

Accessories & Parts	
1110.AP	Arm pack for 1110
1110.APF	Platform arm pack
1110.APH	Hold-open arm pack
1110.BRK66	Fig.66 bracket pack
1110.FP.ZP	Fixing pack
1110.TPB	Trimplate replacement

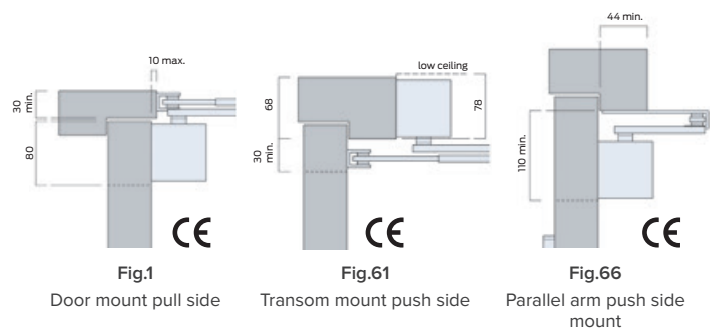

### Finishes

All finish variants are supplied with matching armset and brackets.

Other sprayed finishes are available on request.



SES  
Sprayed silver



GES  
Sprayed gold



SSS  
Satin stainless steel



PSS  
Polished stainless steel



PBS  
Polished brass

## General Maintenance

### Door controls

In research, Allegion has identified that 95% of all problems associated with overhead door closers can be attributed directly to errors in installation rather than problems with the door closer itself. If the door is not closing properly into the frame you should first disconnect the door closer (disconnect the arm(s)) and determine that there is not an underlying problem with the door, frame or any smoke / draft seals that might be fitted.

### PLEASE NOTE:

The power of the door closer should not be used to overcome problems associated with the door or other items of hardware fitted to it. Under no circumstances should the closer body be dismantled.

### Types of maintenance

Much of the routine maintenance recommended consists of a combination of visual and mechanical checks, cleaning and lubrication. Look out for the icons opposite which provide a 'quick glance' reminder of the maintenance required.

#### Visual checks

Primarily making a visual check on the product and surrounding door/frame looking for wear, damage, and general condition.



#### Functional checks

Consists of checking that the product operates properly ensuring the door can fully close without any binding or undue force required. Check that any seals or weatherstripping do not inhibit correct operation of the door



#### Check fixings

Fixings need to be checked regularly and tightened when necessary. Check that no projection of fixings prevents the door from swinging freely.



#### Lubricating

Some products will benefit from periodic lubrication using a light machine oil or as instructed.



#### Cleaning

Build up of grease, dust and harmful chemicals should be removed to prevent corrosion and maintain the product finish.



### Closer Maintenance

#### WEEKLY

Release the door from the fully open position and ensure that it closes fully into the frame. Ensure the latch (if fitted) engages fully into the strike plate. Repeat the process a few times from different angles of opening to ensure the door closes consistently each time.



Check and adjust the closing and latching speeds if necessary.

Check that the door or hardware does not come into contact with the door frame or the surrounding structure.



#### QUARTERLY

The fixings of the closer body and the bracket are subject to stress and should be checked carefully to make sure they are tight.



Periodically apply a little light machine oil to the moving joints of the arm and bracket.



Check any fire and smoke seals to ensure they do not foul the action of the door.



Check for any loss of fluid from the door closer body which would indicate a failing device.

Clean the closer body, arms and bracket if necessary following the guidance on "Care of Finishes" on page 16 of the 'Service & Maintenance Guide'.



#### FIRE DOOR APPLICATIONS

When installed as part of a fire precaution system the door closing mechanism, including the door selector if used on a double door arrangement, should be checked in accordance with standing periodic fire testing procedures.

Routinely check that all fixings of the closer body and bracket are tight.

Routine care of finishes as necessary.